

Aux Port
Installation Instructions
For Arm Rest Harness



Thank you for choosing the Double Apex Aux Port! If you have any questions about the installation please do not hesitate to email us at support@doubleapex.co or call 978-371-8585. A digital copy of this manual can be found at www.doubleapex.co on the product page.


Parts Included:

A - Aux Port (x1)

B - Wire harness (x1)

C - T20 Torx key (x1)

Please Note: These instructions are based on a VW MK5 GTI. Your vehicle may be slightly different. If you encounter a substantial difference in the install procedure, please contact Double Apex LLC.

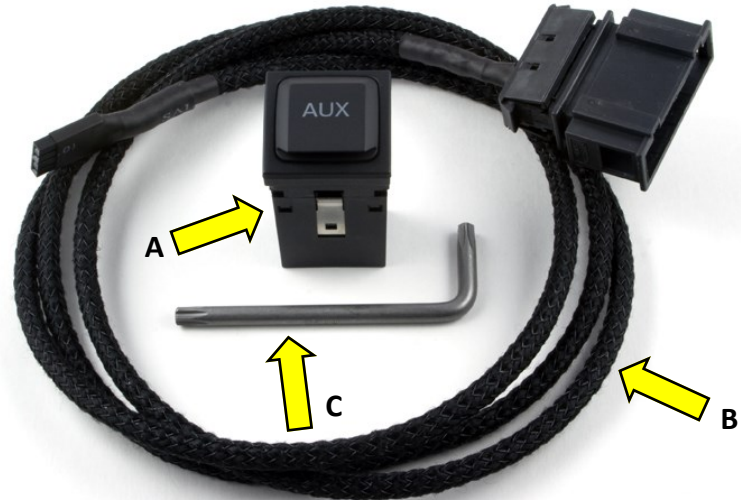

Step 1:

Move the shift lever to the rearmost position.

Grasp the edges of the trim surrounding the shifter, where it meets the shift boot and pull straight up to detach. Pull it up and out of the way to expose the Torx screws shown in the next step.

If the trim won't release easily, use a plastic trim removal tool and pry carefully around the edges.

Step 2:


Using the included T20 Torx bit remove the two screws at the front of the button cluster. Be careful not to let the screws fall into the shifter recess. Set the screws aside in a safe place.



Step 3:

Lift up the front of the button cluster enough to expose the connectors below. **Make sure the key is in the off position.**

1. Disconnect the ESP and any other button harnesses by depressing the tab on the left side of the connector and pulling downward. Put some downward pressure on the button top while doing so to prevent it from moving upward and possibly dislodging its retaining clips.
2. Detach the harness support. You may want to pry it loose with a small flat head screw driver.
3. Disconnect the 12v power socket by depressing the tab on the connector and pulling downward.
4. Pull the center tray assembly up and outward from its recess and set it aside for now.

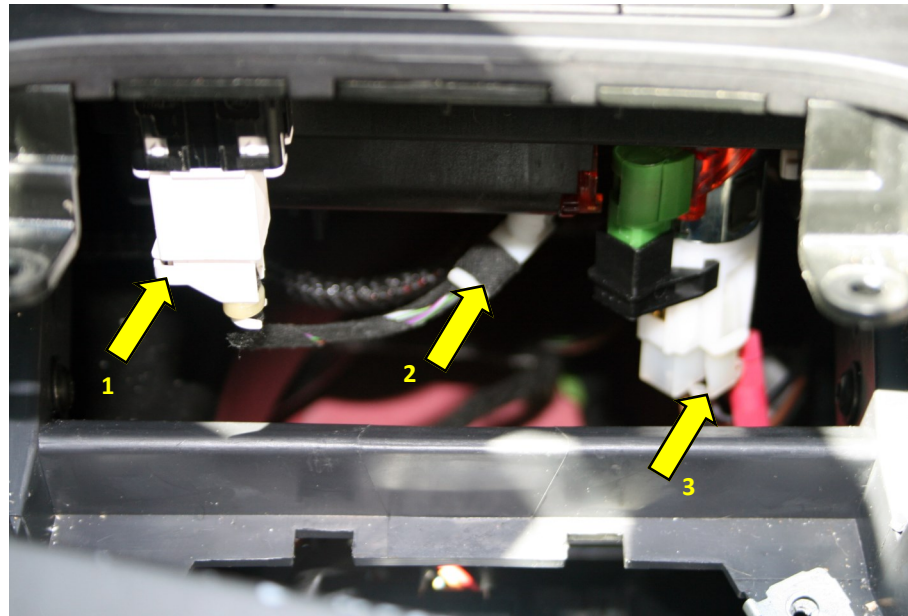

Step 4:


Use a plastic trim tool and carefully pry around the edges and remove the pocket under the armrest.

Step 5:

Disconnect the iPod dock or Aux harness by depressing the two tabs and pulling apart (iPod harness shown). If you are replacing an aux input you can remove the input and replace with a blank cover (sold separately).


Step 6:

Connect the new wire harness and feed the small connector from inside the armrest out through the gap at the base of the plastic shell. This can be done by hand but it may be easier to use mechanics or coat hanger wire to help feed the cable through the opening.

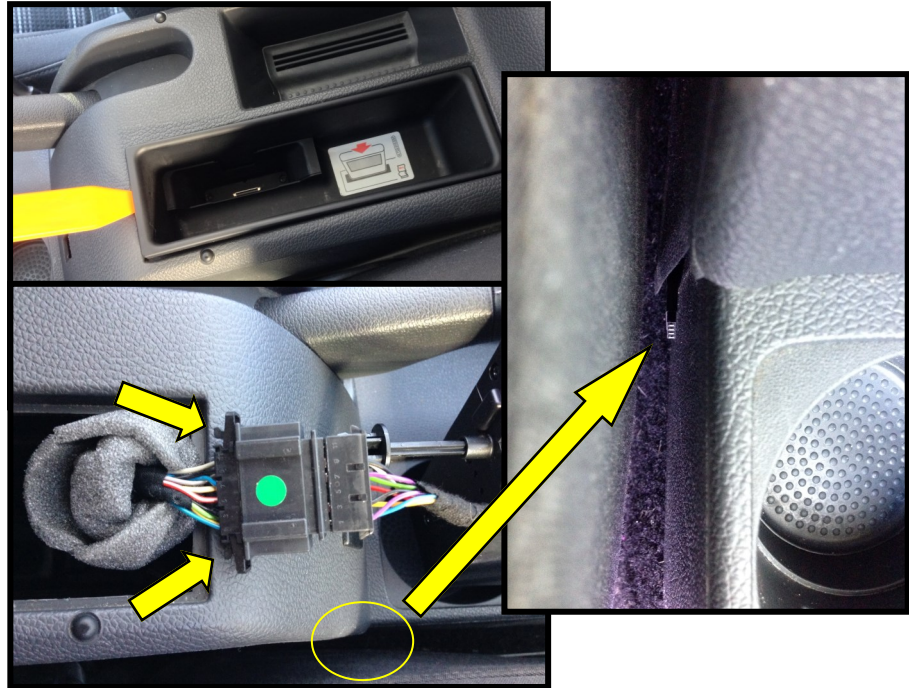

Step 7:

Feed the wire harness into the center console opening, at the base of the plastic shell.

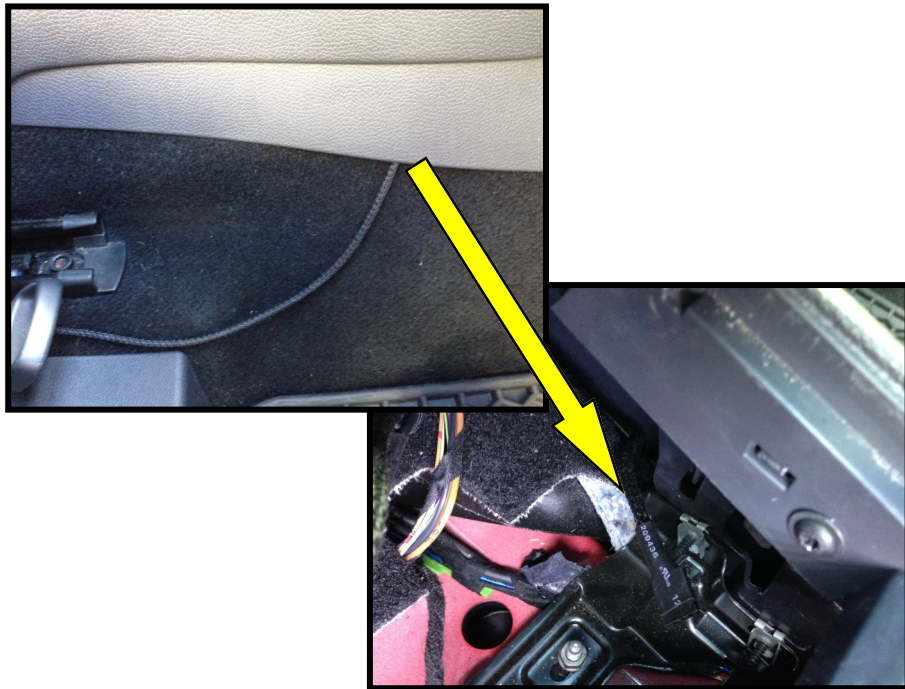


Step 8:

Remove the middle blank in the button cluster where you want to install the Aux port and snap the Aux port into place.

Step 9:

On the wire harness there is a triangle marking on one side of the connector. Align this end of the connector with the pin on the Aux Port marked by the yellow circle in the photo and push firmly into place.

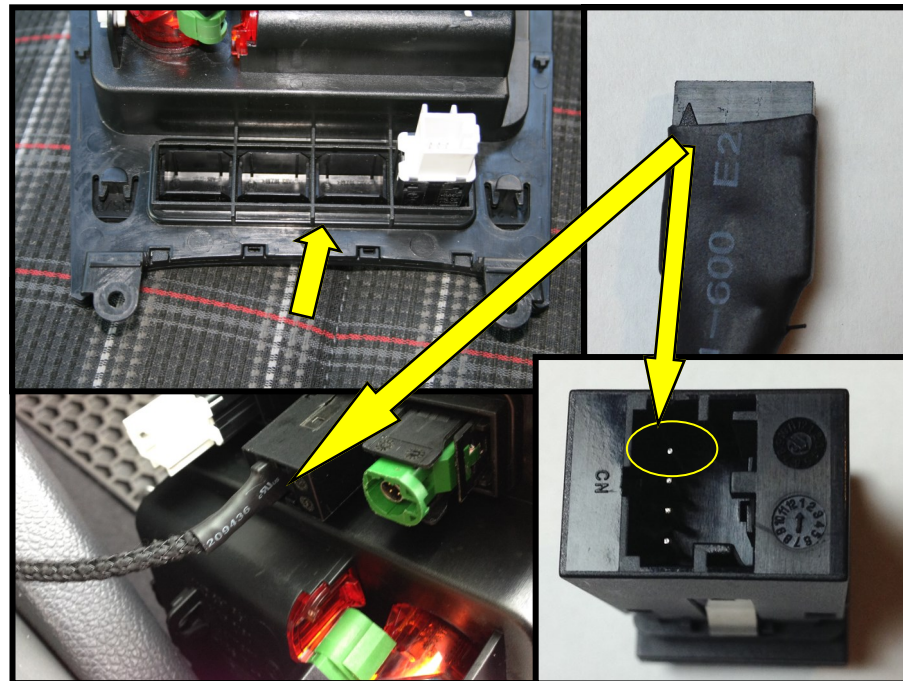


Step 10:

If you are replacing an iPod dock the radio needs to be recoded using a Ross Tech VCDS or VW scan tool.

1. Go to the “56-Radio Control Module”
2. Go to “Coding-07”
3. Change the last digit of the “Software Coding” to a 1
4. Now pressing the CD button on the radio should switch to the Aux input.

Step 11:

Before final reinstall test connect your audio source to the Aux Port and make sure everything is working correctly.

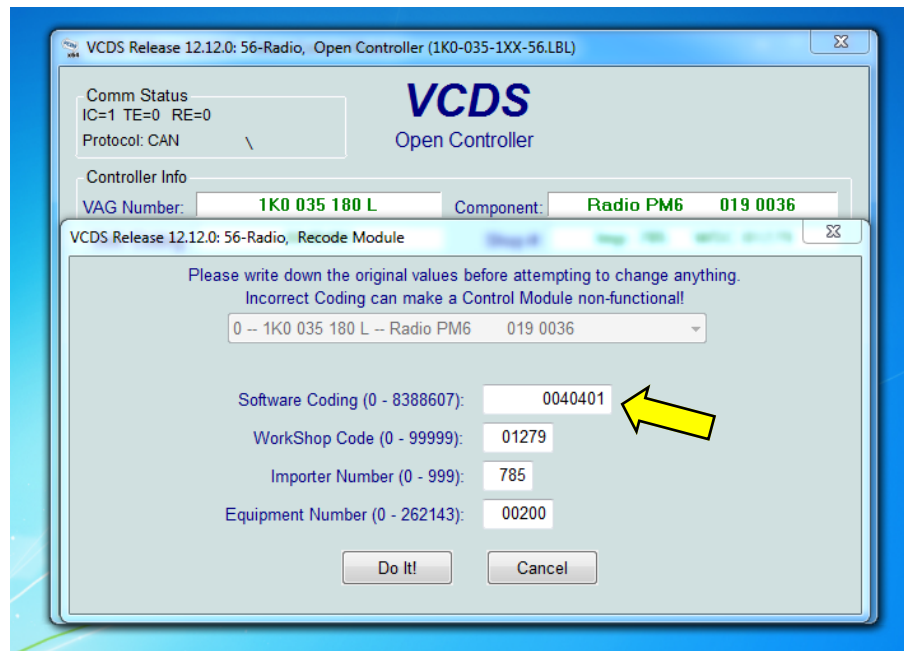

Step 11:

Reinstall the center tray assembly, using the original Torx screws. Tuck the exposed wire harness under the center tunnel plastic cover and reinstall the pocket under the armrest.

Thank You!

Thank you again for choosing the Double Apex Aux Port. We believe in continuous improvement so until our products install themselves and respond to telepathic commands there's probably something we could do better. All feedback is appreciated. If you have comments or questions please don't hesitate to contact us at support@doubleapex.co or visit us at doubleapex.co.

Limited Warranty

Double Apex LLC warrants this product, Aux Port, to be free from defects in materials and workmanship for one year from date of purchase to the original retail Purchaser.

Double Apex LLC reserves the right to repair or replace the defective product at their discretion, without charge. This is the only remedy the purchaser has for any loss or damage due to any defect in the product. This warranty does not cover labor, lost profits, down time or loss of use, shipping costs, damage to the vehicle or other incidental, indirect or consequential damages.

This warranty is void if the product is misused, abused or installed incorrectly.

The Purchaser is responsible for ensuring that the product is installed correctly and should immediately stop use of the product if an improper or unsafe condition is observed.

Please contact Double Apex LLC to make a warranty claim before returning the product.



www.doubleapex.co
email: support@doubleapex.co